

3.5T high voltage lithium battery forklifts with Cloud Intelligence Forklift Management System

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: goodsense
- Model Number: FB35LH
- Minimum Order Quantity: Negotiable
- Price: Negotiable
- Packaging Details: Bare packaging
- Delivery Time: 30-40work days
- Payment Terms: T/T




Product Specification

- Load Centre: 500mm
- Service Weight: 4580kg
- Place Of Origin: China
- Brand Name: Goodsense
- Name: Forklift
- Condition: New
- Energy Supply: Reference Introduction
- Advantage: Small Vibration And Noise
- Highlight: lithium battery forklifts,
lithium battery electric forklift,
new battery forklifts



More Images



Product Description

GOODSENSE LH series 3.5T high voltage lithium battery forklifts inherit the mature and reliable internal combustion forklift platform, equipped with advanced high-voltage permanent magnet technology and intelligently controlled liquid cooling system. The electric forklift has the same chassis as the internal combustion ones, and its performance is comparable to that of the internal combustion forklift, especially suitable for heavy work


Advanced H-type remote drive unit. compact structure, lower gravity center, more reasonable layout, most stable driving. The 370V high-voltage electrical platform is used to meet the high-performance operation, and at the same time, it has a lower working current, reduces the energy loss caused by the current thermal effect, and significantly improves the forklift's endurance.

Technical Specification

Characteristic				
1.01	Model		FB30LH	FB35LH
1.02	Power Type		Lithium Battery Electric	Lithium Battery Electric
1.03	Rated Capacity	kg	3000	3500
1.04	Load Centre	mm	500	500
1.05	Service weight	kg	4580	4850
Tyre & Chassis				
2.01	Tyre Type (Front/Rear)		Pneumatic	Pneumatic
2.02	Wheel number X = drive wheel (Front/Rear)		2X/2	2X/2
2.03	Tyre Size (Front)		28×9-15-14PR	28×9-15-14PR
2.04	Tyre Size (Rear)		6.50-10-10PR	6.50-10-10PR
2.05	Front Tread	W1 mm	1000	1000
2.06	Rear Tread	W2 mm	970	970
2.07	Wheelbase	L4 mm	1700	1700
Size				
3.01	Fork Size (L × W × T)	L1 mm	1070 × 125 × 45	1070 × 125 × 50
3.02	Mast Tilt Angle (F/R)	α/β deg	6/12	6/12
3.03	Lift Height	H mm	3000	3000
3.04	Mast Lowered Height	H1 mm	2115	2150
3.05	Free Lift Height	H5 mm	125	125
3.06	Mast Extended Height	H2 mm	4180	4180
3.07	Backrest Height	mm	1150	1150
3.08	Fork Spread	mm	250-1100	250-1100
3.09	Length to Face of Fork	L mm	2741	2796
3.10	Overall Width	W mm	1224	1224
3.11	Overhead Guard Height	H3 mm	2180	2180
3.12	Distance From Roof to Seat	mm	1020	1020
3.13	Front Overhang	L2 mm	481	506
3.14	Rear Overhang	L3 mm	575	610
3.15	Turning Radius (outside)	r mm	2460	2495
3.16	Ground Clearance (Bottom of mast)	H4 mm	140	140
3.17	Min. intersecting aisle width	Ra mm	2460	2500
3.18	Min. right angle stacking aisle width	RASA mm	4210	4270

Performance			
4.01	Max.Travel Speed (Full load/No load)	km/h	17/18
4.02	Lifting Speed (Full load/No load)	mm/s	420/450
4.03	Lowering Speed (Full load/No load)	mm/s	≤600/≥300
4.04	Max.Gradeability (Full load)	%	20
Power & Transmissions			
5.01	Battery (Voltage/Capacity)	V/Ah	307.2/105
5.02	Drive Motor	kW	27
5.03	Lift Motor	kW	25
5.04	Driving Type		AC
5.05	Hydraulic Tank Volume	L	48
5.06	Operating Pressure	Mpa	18

Meter Function Icon

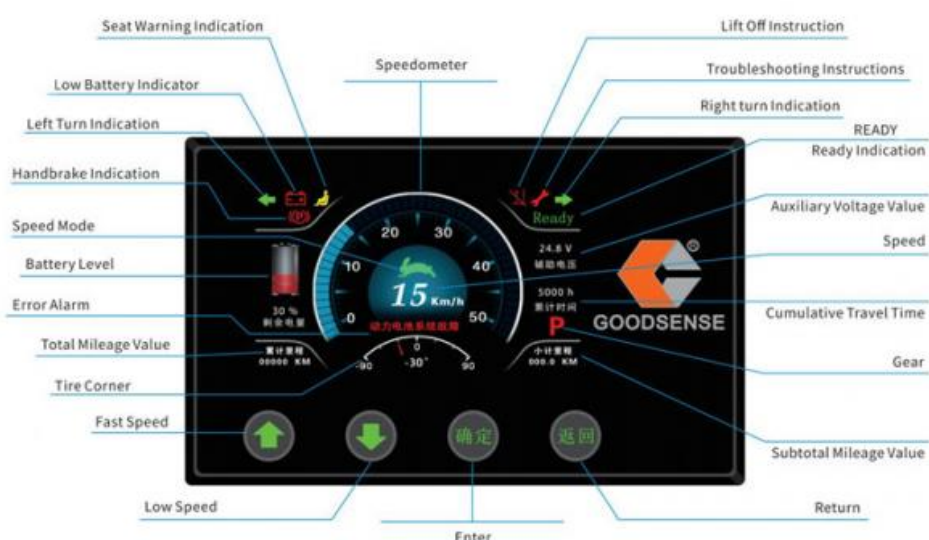

3.5T high voltage lithium battery forklifts with Cloud Intelligence Forklift Management System

The cloud intelligent forklift management system uses advanced Internet of Things and Internet technology, combined with manual forklifts to achieve vehicle data collection, vehicle alarm, vehicle remote control box diagnosis, vehicle scheduling, logistics tracking and other functions to help users manage vehicles. Intelligent scheduling and intelligent logistics management and control improve the level of enterprise equipment management and logistics management, and the forklift cloud intelligent terminal can wirelessly connect to the cloud intelligent forklift management system.

The standard configuration:

Full hydraulic power steering Steering wheel adjustable device Lift oil pedal speed limiter valve Two-stage mast Standard fork Cable handbrake Standard overhead guard Pneumatic tires Seat with seat belt Anti-skid pedals for getting on and off

Two-piece multi-way valve Lift and tilt joysticks Hydraulic dipstick Tilt oil circuit self-locking valve Neutral safety switch Emergency power off switch Seat perception system Reversing buzzer Multi-function controller instrument Electric horn Left and right rear view mirror LED split tail light LED combination headlights Warning Light On-board toolbox Folder

Optional configuration:

Full suspension seat High and low overhead guard Front and rear windshield Wiper Cab Overhead guard with front protection net Cab heater Panoramic rear view mirror USB charging port

Rear armrest with horn button LED rear work light Roof fan 3/4/5 piece multi-way valve Electronically controlled multi-way valve Fire extinguisher Solid tire User specified color

Lithium battery capacity selection table:

Battery capacity Electricity 3.5T

307.2V/105Ah 32.256/Kwh The standard configuration

3.7.2V/150Ah 46.08/Kwh The optional configuration



Taizhou Ruidong Import and Export Co., Ltd



18367688514



gj_0208@163.com



rdforklift.com

